

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 992 297 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
12.04.2000 Bulletin 2000/15

(51) Int Cl.7: B21C 37/12, B21D 5/10

(21) Application number: 99830613.8

(22) Date of filing: 30.09.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Caporusso, Alessandro  
03030 Piedimonte San Germano (FR) (IT)  
• Caporusso, Mario  
03030 Piedimonte San Germano (FR) (IT)

(30) Priority: 01.10.1998 IT RM980622

(74) Representative: Gristina, Giorgio  
Studio Rag. GRISTINA Giorgio,  
Via delle Quattro Fontane, 29  
00184 Roma (IT)

(71) Applicant: C.M.L. COSTRUZIONI MECCANICHE  
LIRI S.r.l.  
I-03030 Piedimonte San Germano  
(Frosinone) (IT)

### (54) Bending machine to wind a strip or the like into a spiral

(57) A bending machine to wind a strip or the like into a spiral comprising a mandrel (2), a bending tool (3), including a grip portion (32) of an end (50) of a strip (5) and a supporting, guiding and counteracting element (4) on a table (1) of the bending machine is disclosed. The bending tool (3) further comprises a plurality of modular elements (60, 61, 62, 63, 64 ...) consecutively so jointed to be relatively movable according to prede-

termined plane rotations, connected to the grip portion (32), so that, in the rotation of the mandrel (2), the plurality of modular elements roll up on the grip portion (32), with the strip (5) being interposed, so that the path of radially internal and external surfaces of said modular elements are spiral and continuous. The supporting element (4) includes a friction roller-holder lever (40), which can be operated by a vice.

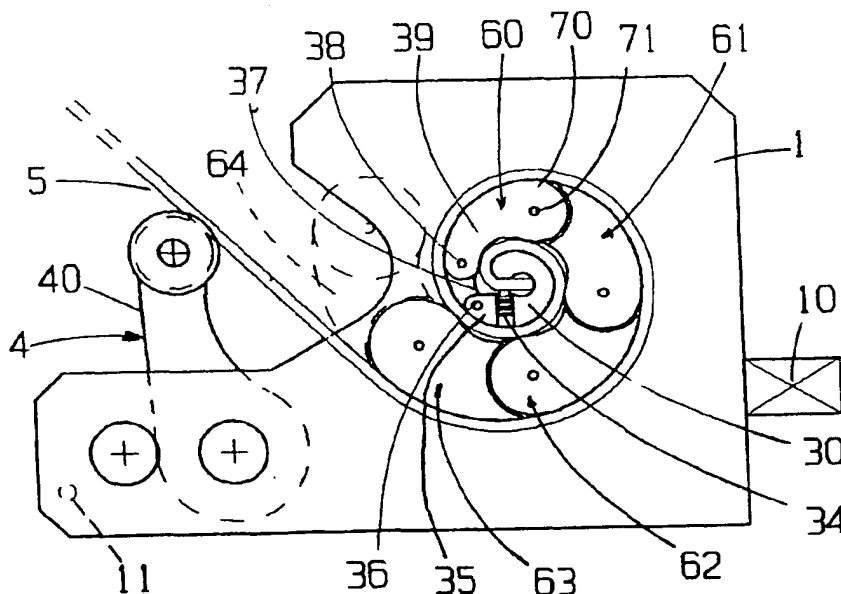


fig.3

EP 0 992 297 A1

## Description

[0001] This invention relates to a bending machine to wind a strip or the like into a spiral. Usually, a spiral-bending machine has a mandrel supporting a bending tool designed to receive and retain an end of a strip or the like to be bent and at least a supporting or counteracting element of a strip to allow its permanent deformation. Here and below the term of "mandrel" means in proper sense the shaft transmitting the movement to a workpiece.

[0002] In a spiral-bending machine known, the bending tool consists generally of a circular plate rigidly supporting on its external side a projection shaped according to a portion of spiral. In order to obtain a spiral, for example, of three turns, therefore a complete set of bending tools of the above mentioned type is necessary, comprising for example a first bending tool for the first turn near the pole, a second bending tool for the second tool and so on. A roller of a supporting and counteracting element rigidly supported to the machine table is operatively connected to the first bending tool, while a second roller, being part of the same supporting element but fitted on the table in a diametrically opposed position, is connected to the second bending tool. Just the same for the third turn. Naturally this kind of spiral-bending machine requires, for making only three turns, that three bending tools are fitted on and removed from the mandrel and correspondingly the supporting and counteracting element is fitted on and removed from three different positions on the machine table. In addition to a waste of time, one must consider that the operation needs of a certain capacity by a worker. He must estimate correctly in which point he has to stop the bending operation by means of a bending tool and continue it by means of a subsequent bending tool without suffering from problems of interference of the workpiece already partially bent by the bending tool useful for carrying on the spiral machining. In another spiral-bending machine known the bending tool consists of a first bending tool member connected to a mandrel, acting as a grip element for the strip to be bent, and of second bending tool member able to be arranged continuously with the first bending tool member to form a complete turn or a little more. The second bending tool member is shaped "as a comma", having a thickened portion, through which it is pivoted on the first bending tool member, and thinning with an arc toward the free end. The second bending tool member is provided in various conformations, to which different patterns of the portion of spiral obtainable correspond. As a whole, the bending tool of this second spiral-bending machine is not so rigid to allow metal workpieces of different material and thickness to be worked in a same satisfactory way, unless the worker runs the risk of breaking the bending tool. Further, such a bending tool enables the spiral-bending for a little more than a turn, as it is not possible to add other elements overhanging on the second bending tool mem-

ber.

[0003] A main object of this invention is therefore to overcome the drawbacks of the prior art spiral-bending machines.

[0004] In particular, an object of the invention is to enable a spiral-bending operation with permanent deformation of a strip or the like, without requiring any replacement of both the bending tool or the cooperating element adapt to support a workpiece and counteract.

[0005] Another object of the invention is to enable a bending machining according to any spiral desired continuously, i.e. without stops.

[0006] Yet another object of the invention is to enable a spiral-bending operation of any strip or the like, independently of its thickness and the material of which it is made.

[0007] A further object of the invention is to enable a machining in which the bending operation is carried on in safety conditions for the worker, by virtue of the reliable retain of the strip being worked.

[0008] Yet a further object of the invention is to make easier to fit into the bending tool the strip to be bent and to enable a convenient removal thereof.

[0009] In addition an object of the invention is to enable any bending machine, such as an arching machine, a twisting machine, etc. to operate according to the way of a spiral-bending machine, since the spiral-bending machine can constitute an attachment which may be applied to any bending machine if required.

[0010] A further object of the invention is to enable a substantially automatic bending operation depending upon the number of turns to be made.

[0011] These objects are achieved by the present invention which provides, such as defined and characterised broadly in the first one of the accompanying claims and in its more meaningful particular embodiments in the subsequent claims, a bending machine to wind a strip or the like into a spiral comprising a mandrel, a bending tool, including, in its connection part adapted to the connection with the mandrel, a grip portion gripping an end of a strip or the like to be bent, and at least a supporting, guiding and counteracting element on a table of the bending machine for the permanent deformation of the strip or the like, characterised in that said bending tool further comprises:

- a plurality of modular elements consecutively so jointed to be relatively movable according to predetermined plane rotations;
- a junction link connecting said plurality of modular elements to said grip portion; said junction link having a wide interval of rotation both with respect the grip portion and with respect to the plurality of modular elements; during the rotation of the mandrel according to the direction of machining, said plurality of modular elements rolling up on said grip portion, with the strip or the like being interposed, so that the path of radially internal and external surfaces of

said modular elements are spiral and continuous;  
 - said supporting, guiding and counteracting element includes a roller-holder lever, pivoted on said table of the bending machine and bearing, pivoted transversely to the free end of the roller-holder, a supporting, guiding and counteracting roller for the strip or the like so that said lever is rotated by the strip or the like, along a determinate angular travel, in the same direction of rotation of said mandrel.

**[0012]** The invention is described more in detail below, only by example but not in limiting way, in connection with a preferred embodiment thereof with reference to the accompanying drawing, in which:

- Figure 1 is a fragmentary top view, partially cross-sectioned, of a bending machine according to this invention.
- Figure 2 is a vertical front view of the bending machine according to this invention in an initial machining step.
- Figure 3 is a vertical front view of the bending machine according to this invention in an intermediate or final machining step.
- Figure 4 is an enlarged cross-section view of a supporting, guiding and counteracting element of the bending machine according to this invention. In the figures there are designed as 1 a table of the bending machine, as 2 a mandrel of the bending machine, as 3 a bending tool and as 4 a supporting, guiding and counteracting element.

**[0013]** With reference to figures 1 to 3, there are shown the table 1, which may function as a supporting attachment of a spiral-bending machine when a mandrel of universal bending machine, an arching machine or other bending machine, etc. is used as mandrel 2, or may constitute an integral part of a specific spiral-bending machine.

**[0014]** The bending tool 3 has a cylindrical body 30 provided with a connection part 31, on the one side thereof, connecting the bending tool 3 to the mandrel 2 (figure 1), which is supported through a bearing 21 to the table 1, and the other side with a grip portion 32, gripping the end of a strip 5 or the like to be bent. The connection part 31 comprises a hollow cylindrical portion 310 provided with fastening means to secure the connection part 31 to the mandrel 2, such as for example a threaded coupling between the bending tool 3 and the mandrel 2, or a spline made on the external surface of the connection part 31 for a key joint.

**[0015]** The grip portion 32 is essentially a channel having a central notch 33 (figures 2, 3) designed to receive an end portion 50 of the strip 5. The grip portion 32 has a retaining means of the end portion 50, such as for example a security dowel 34 to be screwed against the same portion.

**[0016]** The grip portion 32 extends to a fork portion 35

which is crossed by a through pin 36 parallel to the axis of the mandrel. Pivoted on the pin 36 is a junction link 37, which is connected through another pin 38 to a fork portion 39 of a first modular element 60 of a plurality of modular elements 60, 61, 62, 63, 64 ... consecutively so jointed to be relatively movable according to predetermined plane rotations. The junction link 37 connecting the plurality of modular elements to the grip portion 32 has a wide interval of rotation, for example more than 180° both with respect the grip portion and with respect to the plurality of modular elements, in order to make easier to insert the strip 5 into the portion grip 32 and prevent the same strip from interfering with the bending tool 3.

**[0017]** The modular element 60, at other side far from its fork portion 39, has a similar fork portion 70 for the connection through a pin 71 of the modular element 60 to the modular element 61. Alternatively, this arrangement of male link coupling could be a female link coupling by consequently inverting the homologous coupling parts. The modular elements 61, 62, 63, 64 ... and, if any, others (not shown) have a solid portion as a relative rotation seat of the preceding modular element and a fork portion for the relative rotation of the subsequent modular element.

**[0018]** The modular elements act as a flat link chain having parallel pins. The relative rotation among the elements is selected so that the elements take varying positions between a free hanging position shown in figure 2 in an initial step of the bending operation and a final position. In the last position the bending tool 3 is completely rolled up on itself, in particular on its grip portion 32, with the strip 5 being interposed, so that no empty space between the strip and the bending tool is left. Thus the maximum stiffness is achieved in the working step. The arrangement of the modular elements can be obtained in succession by means of joint elements different from the parallel pin joints.

**[0019]** The longitudinal section of the modular elements 60, 61, 62, 63, 64 ... is shaped substantially as a bean having form and dimensions corresponding to the particular spiral according to which the strip or the like must be bent. In particular said modular elements are so made that the path of their radially internal and external surfaces are without a break in order to obtain a continuous curvature on the strip 5 and cause no deformation on the internal and external surfaces.

**[0020]** The supporting, guiding and counteracting element 4 includes a roller-holder lever 40, pivoted on the table 1 of the spiral-bending machine in a seat selected among a multiplicity of seats which are provided at different distances from the mandrel 2.

**[0021]** A roller 41 supporting, guiding and counteracting the strip or the like being worked is pivoted transversely to the free end of the lever 40 in its portion 42. The roller-holder lever 40 is rotated in the direction of an arrow F (figure 2) of the strip or the like for a determinate angular travel (shown in figures 2 and 3), in the

same direction of rotation of the mandrel shown by an arrow G (figure 2).

**[0022]** The roller-holder lever 40 is pivoted on the shaft 43 of a vice provided with an eccentric control rod 44, having a handle 45, and a coaxial clutch unit 46. An eccentric 47 acts transversely on the clutch unit 46 constituted by at least a friction disk 48, 48 (two in the drawing) side by side with the roller-holder 40. Counteracting springs 49, preferably Belleville washers, having as a seat a coaxial flange 82 abutting against the eccentric 47 and a spacer 83 fitted on the shaft 43 in a sliding and not rotating manner, are interposed between the eccentric 47 and a friction disk 48. Further, the vice is provided with spring calibration means in order to set the friction torque matching the permanent deformation of the strip or the like. Said spring calibration means comprise a spacer 80 cooperating with a screw and adjustment nut 81 to charge the eccentric 47 of the control rod.

**[0023]** Further, stop means 72, 73 of the vice, stopping the rotation of the control rod 45 in mutual relationship with the operation of the eccentric 47 are fitted on said spacer 83 and, respectively, on said eccentric rod 44.

**[0024]** In the spiral-bending machine according to the invention the mandrel 2 is controlled in its rotation by its control member, for example a control pedal (not shown in figures) or, alternatively, the mandrel 2 is a mandrel of a multi-purpose bending machine.

**[0025]** According to the invention the mandrel is connected to a screw and nut screw device 10 for stop microswitches (figure 1) through a toothed belt 9 running on a pair of gear wheels. Instead of said device 10, another automatic control device can be provided.

**[0026]** When the spiral-bending machine is used, an end 50 of the strip 5 is put in the notch 33 of the grip portion 32 of the bending tool 3 which is freely hanging. The strip 5 rests on the supporting element 4, in particular on its roller 41, that has been tightened by the eccentric control rod 44. The adjustment nut 81 of the eccentric 47 is set so to charge the spring 49 of the clutch unit 46 according to the stiffness of the strip to be worked. Then the mandrel 2 is rotated in the direction of the arrow G. While the bending tool 3 is rolled up on the grip portion 32, it causes the strip 5 to be rolled up on the grip portion 32 and be close to the same, "forming only a body". At the same time the strip 5 counteracts the supporting element 4 which gradually moves applying a constant resistance, according to the arrow F in the final position shown in figure 3.

**[0027]** The operation may be executed automatically as above mentioned if the controls to begin and stop the bending operation are interlocked with the stop microswitch device 10.

**[0028]** When the operation is complete, the lever 40 of the supporting element 4 may be loosened by the eccentric control rod 44 to release the strip 5 from the machine. The lever 40 can rotate along an arc until its position is essentially horizontal, as defined by an abut-

ment 11 (figures 2, 3).

**[0029]** The invention so conceived is liable to changes and modification without departing from the scope of the same innovative concept.

## Claims

1. Bending machine to wind a strip or the like into a spiral comprising a mandrel (2), a bending tool (3), including, in its connection part (31) adapted to the connection with the mandrel, a grip portion (32), gripping an end (50) of a strip (5) or the like to be bent, and at least a supporting, guiding and counteracting element (4) on a table (1) of the bending machine for the permanent deformation of the strip (5) or the like, characterised in that said bending tool (3) further comprises:

- a plurality of modular elements (60, 61, 62, 63, 64 ...) consecutively so jointed to be relatively movable according to predetermined plane rotations;
- a junction link (37) connecting said plurality of modular elements to said grip portion (32); said junction link having a wide interval of rotation both with respect the grip portion and with respect to the plurality of modular elements; during the rotation of the mandrel (2) according to the direction of machining, said plurality of modular elements (60, 61, 62, 63, 64 ...) rolling up on said grip portion (32), with the strip (5) or the like being interposed, so that the path of radially internal and external surfaces of said modular elements (60, 61, 62, 63, 64 ...) are spiral and continuous;
- said supporting, guiding and counteracting element (4) includes a roller-holder lever (40), pivoted on said table (1) of the bending machine and bearing, pivoted transversely to the free end of the roller-holder (40), a supporting, guiding and counteracting roller (41) for the strip (5) or the like so that said lever (40) is rotated by the strip (5) or the like, along a determinate angular travel, in the same direction of rotation of said mandrel (2).

2. Bending machine according to claim 1, characterised in that said interval of rotation of said junction link (37) is more than 180°.

3. Bending machine according to claim 1, characterised in that said roller-holder lever (40) may be pivoted on said table (1) in a seat selected among a multiplicity of seats which are provided at different distances from said mandrel (2).

4. Bending machine according to claim 1, character-

ised in that the roller-holder lever (40) is pivoted on the shaft (43) of a vice provided with an eccentric control rod (44) and a coaxial clutch unit (46), an eccentric (47) acting transversely on said clutch unit (46) constituted by at least a friction disk (48) side by side with said roller-holder (40); on said spacer (83) and, respectively, on said eccentric rod (44) there being fitted counteracting springs, spring calibration means in order to set the friction torque matching the permanent deformation of the strip or the like and stop means to stop the rotation of the control rod in mutual relationship with the operation of the eccentric (47).

5. Bending machine according to claim 4, characterised in that said spring calibration means comprise a spacer (80) cooperating with a screw and adjustment nut (81) to charge the eccentric (47) of the control rod (44) against said counteracting springs.
6. Bending machine according to claim 4, characterised in that said counteracting springs are constituted by Belleville washers (49) interposed between said eccentric (47) and said clutch unit (46).
7. Bending machine according to claim 4, characterised in that said stop means of the rotation of said control rod comprise abutment elements (72, 73) provided in said clutch unit (46) and, respectively, on said control rod (44).
8. Bending machine according to claim 1, characterised in that said grip portion (32) of the bending tool (3) comprises a retaining means of the strip (5) in the form of a security dowel (34) to be screwed against the same strip (5) or the like to be worked.
9. Bending machine according to claim 1, characterised in that said modular elements are mutually jointed by cylindrical parallel pins of the type used in a flat link chain.
10. Bending machine according to claim 1, characterised in that said modular elements have longitudinal section shaped substantially as a bean having form and dimensions corresponding to the spiral according to which the strip or the like must be bent.
11. Bending machine according to claim 1, characterised in that the mandrel is controlled in its rotation by its control member, such as a control pedal, of the spiral-bending machine.
12. Bending machine according to claim 1, characterised in that the mandrel is interconnected to a mandrel of bending machine, such as a multi-purpose bending machine.

13. Bending machine according to claim 1, characterised in that said mandrel is connected to a screw and nut screw device (10) for stop microswitches through a toothed belt (9).

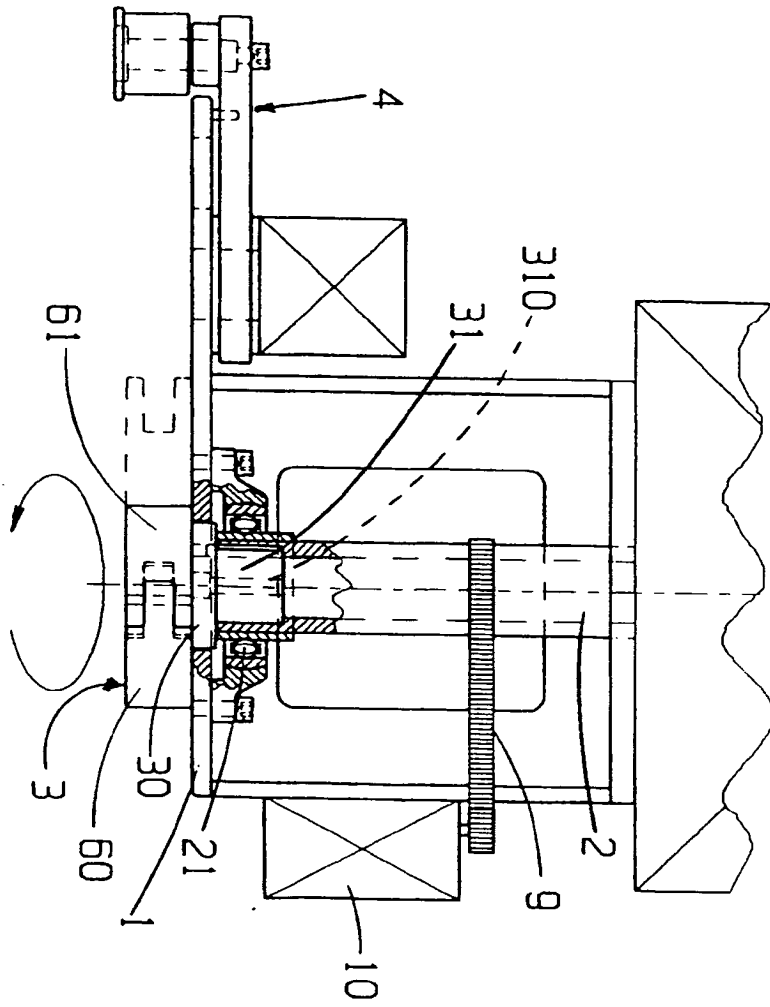


fig. 1

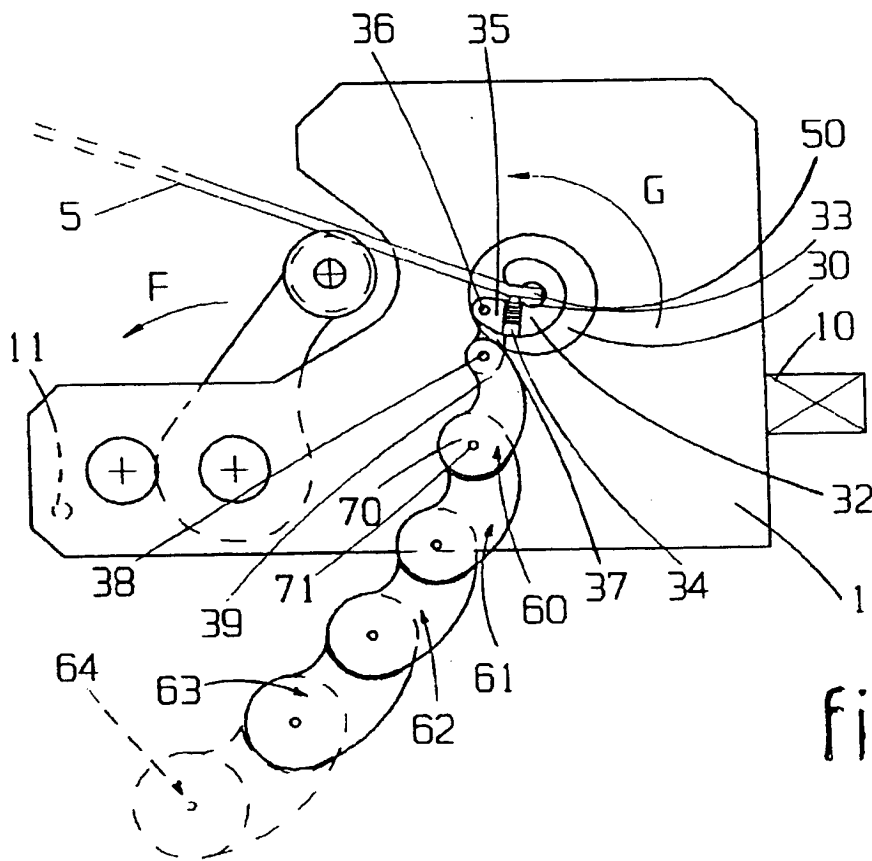


fig. 2


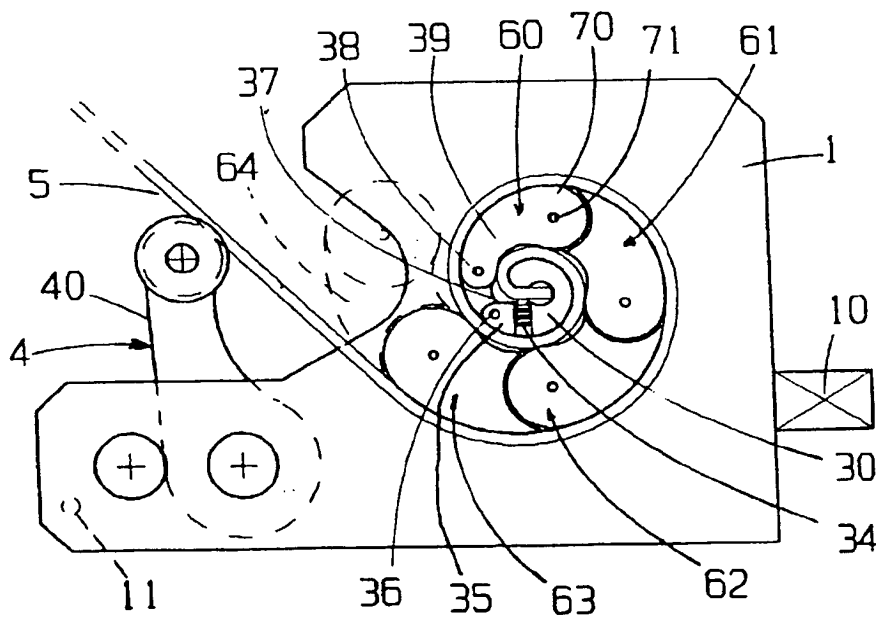


fig. 3

fig. 4





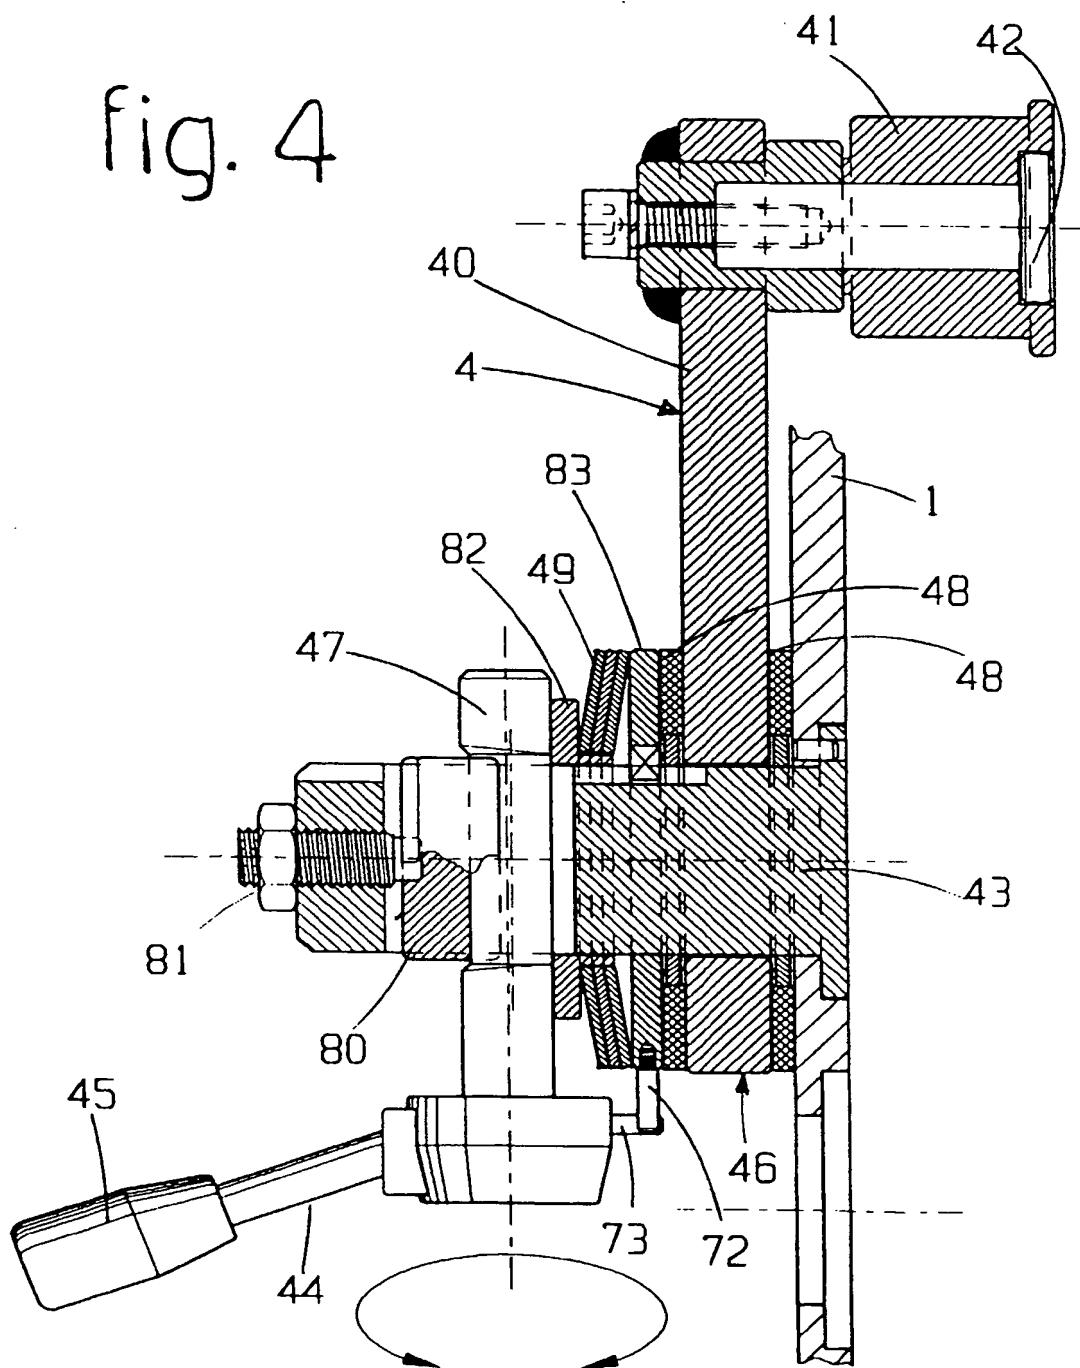

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 83 0613

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 036 690 A (TRU-FLEX METAL HOSE CORPORATION) 6 August 1991 (1991-08-06) * claim 1; figure 1 * ---	1	B21C37/12 B21D5/10
A	EP 0 384 625 A (SPIRO AMERICA INC.) 29 August 1990 (1990-08-29) * claim 1; figures 22,4 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B21D B21C
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>21 January 2000</b>	Examiner <b>Vinci, V</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P) (4/00)

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 99 83 0613

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-01-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5036690	A	06-08-1991	NONE	
EP 384625	A	29-08-1990	US 4924684 A	15-05-1990
			AT 115445 T	15-12-1994
			CA 1322493 A	28-09-1993
			DE 69014934 D	26-01-1995
			DE 69014934 T	13-07-1995
			JP 2247014 A	02-10-1990
			JP 2742316 B	22-04-1998
			US 5105639 A	21-04-1992

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82